


## DETAILED LANDSLIDE AND FLOOD HAZARD MAP OF **BUNAWAN AND ROSARIO, AGUSAN DEL SUR; AND BISLIG CITY, SURIGAO DEL SUR, PHILIPPINES 4217-IV-25 BUNAWAN BROOK QUADRANGLE**



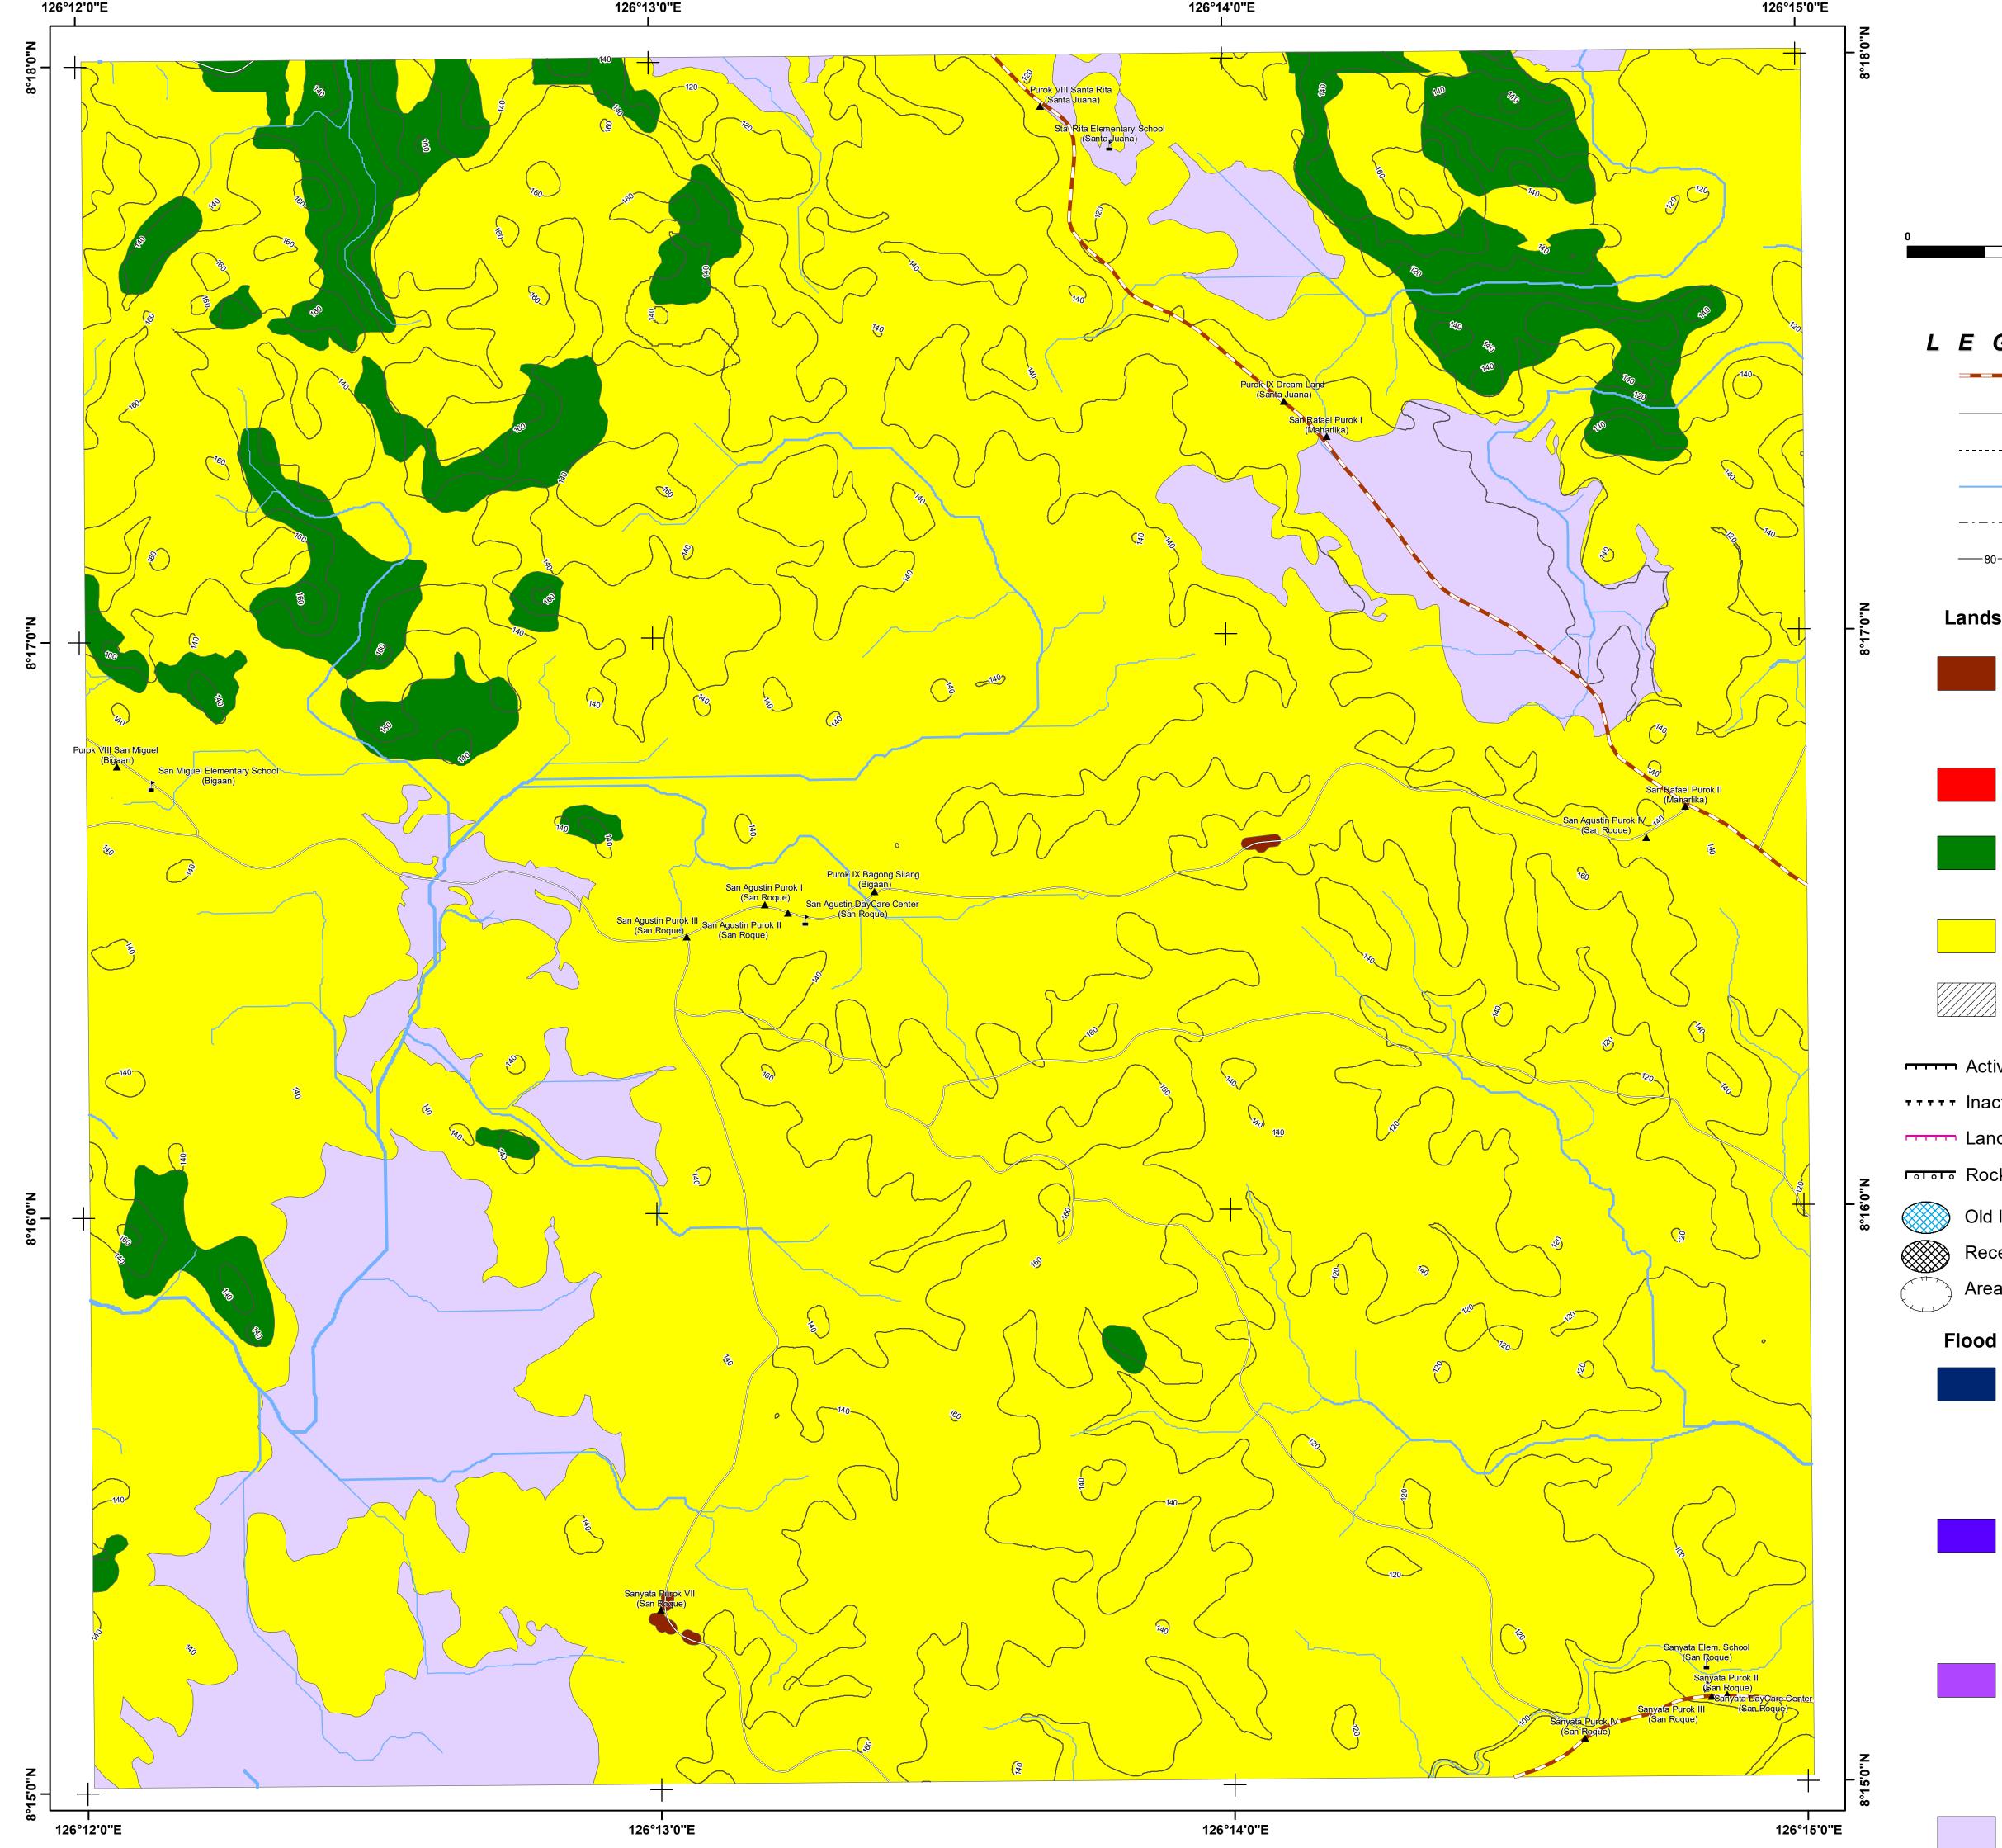

**DEPARTMENT OF ENVIRONMENT AND NATURAL RESOURCES MINES AND GEOSCIENCES BUREAU** North Avenue, Diliman, Quezon City

**Data Sources :** 

ALL RIGHTS RESERVED **PUBLISHED DECEMBER 2015**  GIS Processing :


MGB Geohazard Assessment Team Lands Geological Survey Division Geosciences Division MGB Regional Office XIII

National Mapping and Resource Information Authority

## **Coordinate System :**

Spheroid :.... Clark 1866 Datum :..... Luzon 1911

Mapping scale 1:10,000

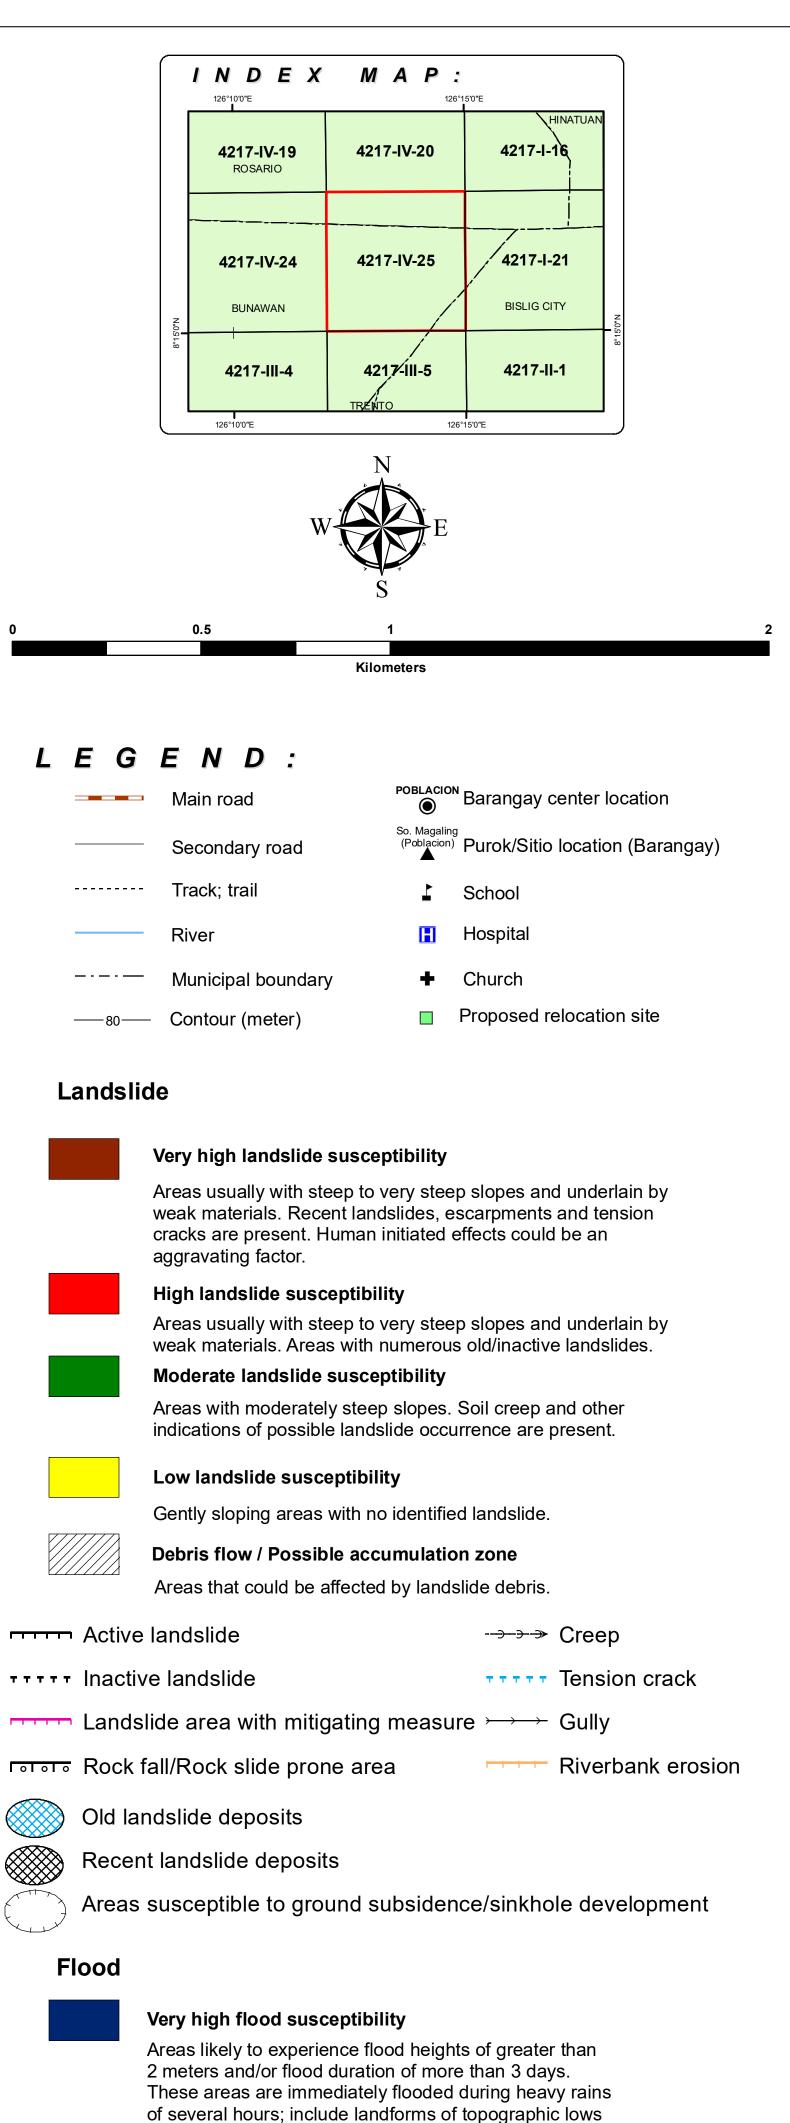

such as active river channels, abandoned river channels and area along river banks; also prone to flashfloods.

Areas likely to experience flood heights of greater than 1 up to 2 meters and/or flood duration of more than 3 days. These areas are immediately flooded during heavy rains of several hours; include landforms of topographic lows such as active river channels, abandoned river channels and area along river banks; also prone to flashfloods.

Areas likely to experience flood heights of greater than 0.5m up to 1 meter and/or flood duration of 1 to 3 days. These areas are subject to widespread inundation during prolonged and extensive heavy rainfall or extreme weather condition. Fluvial terraces, alluvial fans, and infilled valleys are areas moderately subjected to flooding.

Low flood susceptibility

High flood susceptibility

Moderate flood susceptibility

Areas likely to experience flood heights of 0.5 meter or less and/or flood duration of less than 1 day. These areas include low hills and gentle slopes. They also have sparse to moderate drainage density.

Direction of rising floodwater Direction of receding floodwater



 $\overset{1.2}{\otimes}$  Flood depth (meter)

Flashflood exit point